

車載基板用ドリル加工事例 (φ0.8 - φ1.6)

加工条件 [Drilling Conditions]



φ1.0

t1.6(double-sided) x 3stacks
Set Life: 3,000hits

φ1.2

t1.6(double-sided) x 3stacks
Set Life: 3,000hits

穴位置精度 [Hole Registration Accuracy]

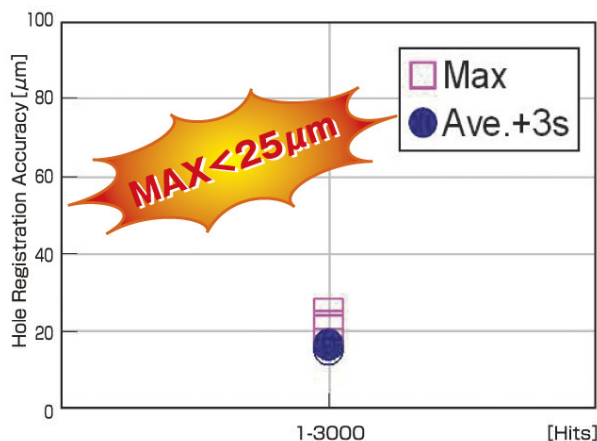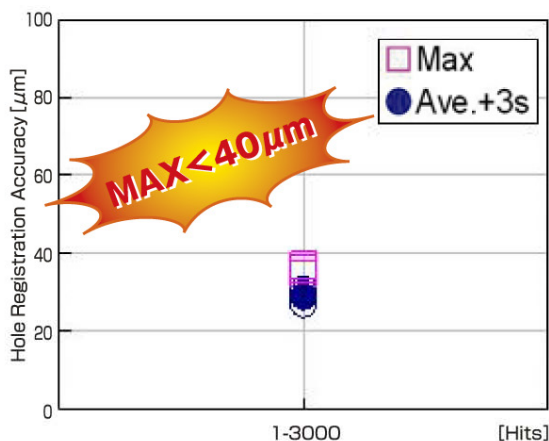

内壁粗さ [Hole Wall Quality After 3000hits]

