

## FX-Series (FPC) Drilling Performance

# FXシリーズ(FPC用)加工事例 (φ0.15・0.2)



### 加工条件 [ Drilling Conditions ]

φ0.15

φ0.2

Work Material : ESPANEX® L Series (Liquid Crystal Polymer CCL Sheet)  
 t0.086(double-sided) x **12** stacks (18/50/18μm)  
 Set Life: 9,000hits

### 穴位置精度 [ Hole Registration Accuracy ]

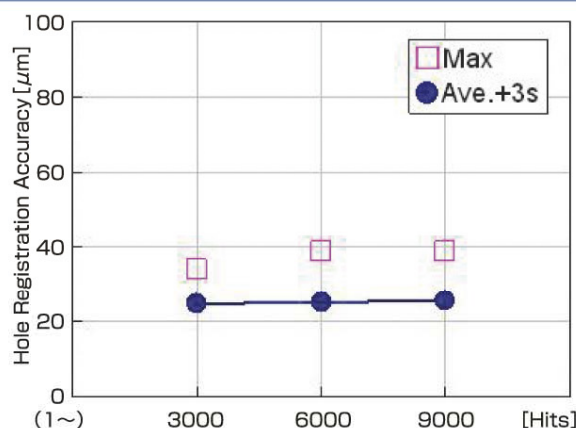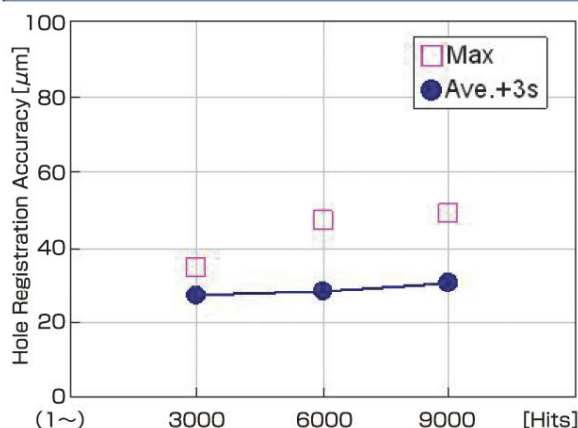

### 内壁粗さ [ Hole Wall Quality After 9000hits ]



Work Material : Nippon Steel Chemical Co.,Ltd.