

FX-Series (FPC) Drilling Performance

FXシリーズ(FPC用)加工事例 (φ0.3・0.35)



加工条件 [Drilling Conditions]

φ0.3



φ0.35

Work Material : 3層フレキシブル銅張積層板“LVAW0518RD”
 t0.685(double-sided) x **20** stacks (18/10/12.5/10/18μm)
 Set Life: 7,000hits

穴位置精度 [Hole Registration Accuracy]

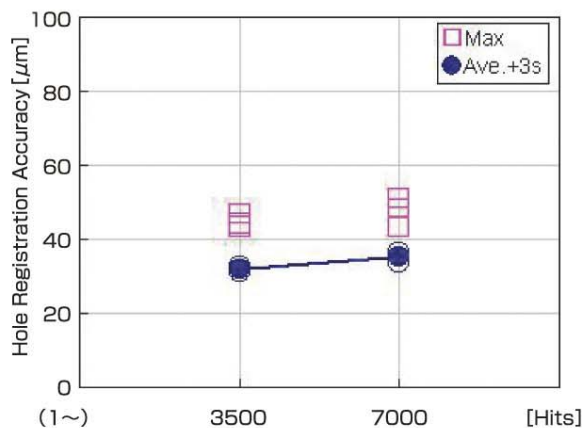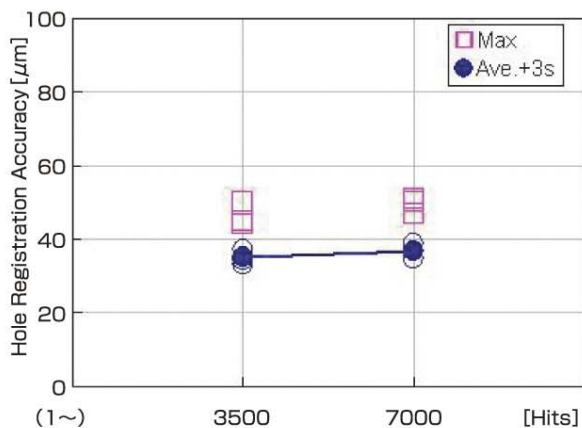

内壁粗さ [Hole Wall Quality After 7000hits]

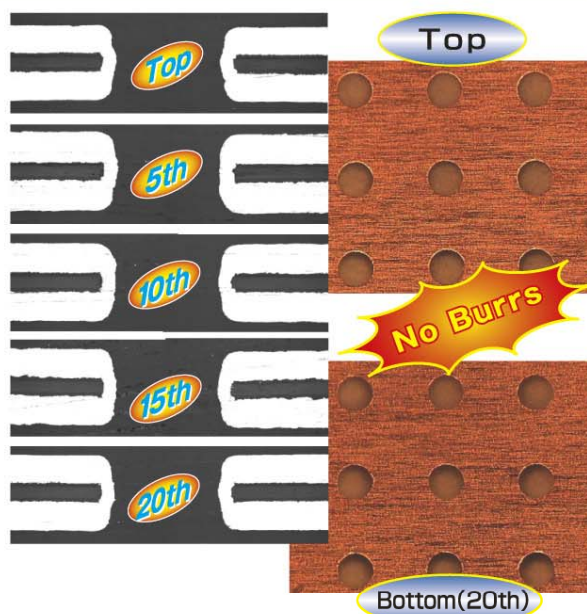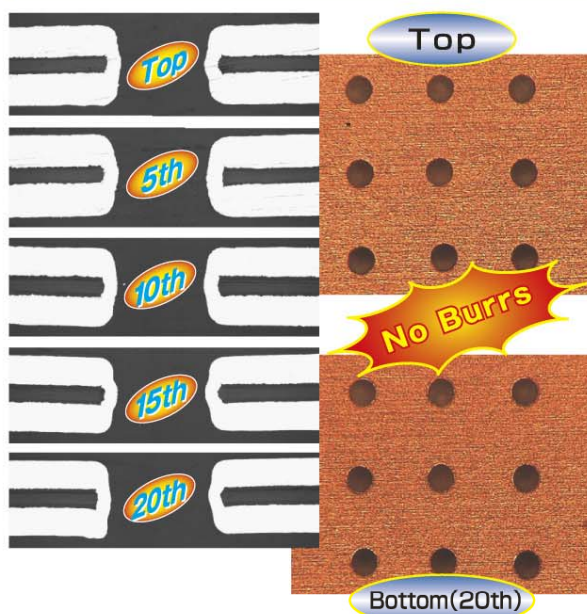

Work Material : ARISAWA Mfg. Co.,Ltd.