

φ0.05 Drilling Performance for μCSP

## μCSP用加工事例 (φ0.05)


### 参考出品

#### 加工条件 [ Drilling Condition ]


Work Material : BT CCL-HL832HS (6/6μm Cu)  
 t0.1(double-sided) x 2stacks  
 Set Life: 10,000hits



#### 折損評価 [ Breakage Life ]

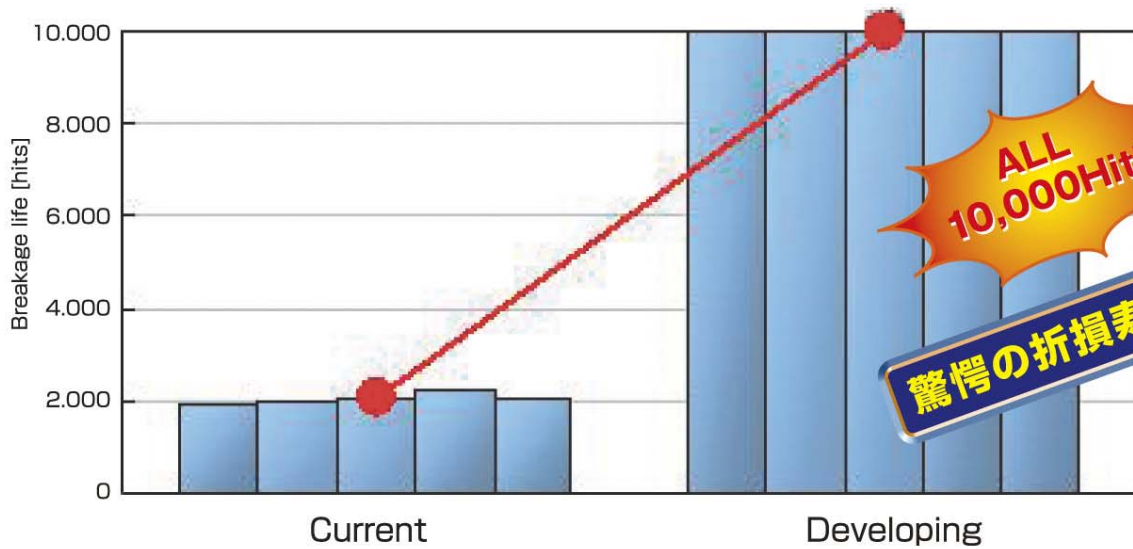

#### 穴位置精度 [ Hole Registration Accuracy ]

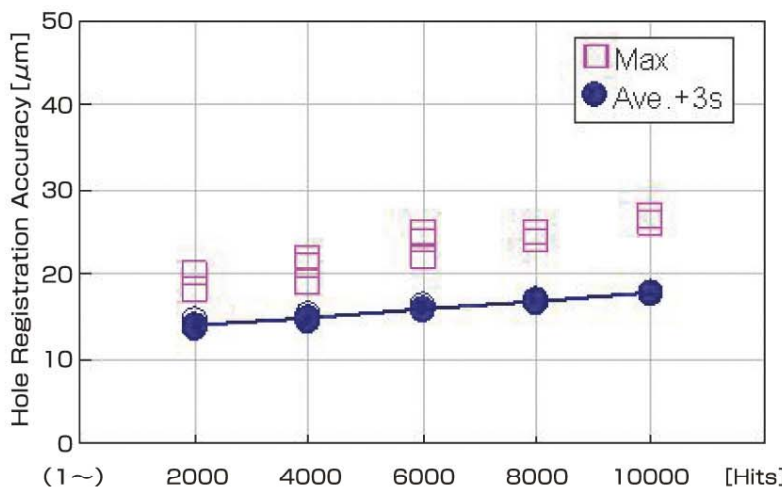

#### 内壁粗さ [ Hole Wall Quality After 6000hits ]



日本特許出願中